

WaveMan 27


Magnetic Field Detection and Warning Device for 27 MHz Fields



Built to reliably warn its wearer from harmful radiation, the WaveMan 27 was designed with practicability in mind. Easily attachable to a belt or worn with a bracelet, the device starts beeping, flashing LED's and vibrating whenever it comes in contact with electromagnetic radiation in the 27 MHz frequency band. Whether you are working with ETCS antennas, certain cellular equipment or other electromagnetic field generating equipment, WaveMan 27 will notify you immediately when it senses the presence of a corresponding field wherever you go.

SPECIFICATION

Model Name	WaveMan 27
Detection Range	27 MHz*
Alarm	Light, Audio and Vibration
Battery	2 × AAA (Included)
Battery Life	Approximately 5 Years (1'000 alarms yearly)
Dimensions (mm) W × H × D	80 × 96 × 36
Weight	110 g
Operating Temperature	-10° C to 50° C, 10% ~ 90% RH Non-Condensing
Certifications	EU directives: 2014/30/EU, RoHS 2011/65/EU EN 55011:2016 + A1:2017 + A11:2020 (class B) EN IEC 61000-6-2:2019, EN IEC 61000-6-3:2019 EN IEC 63000:2018

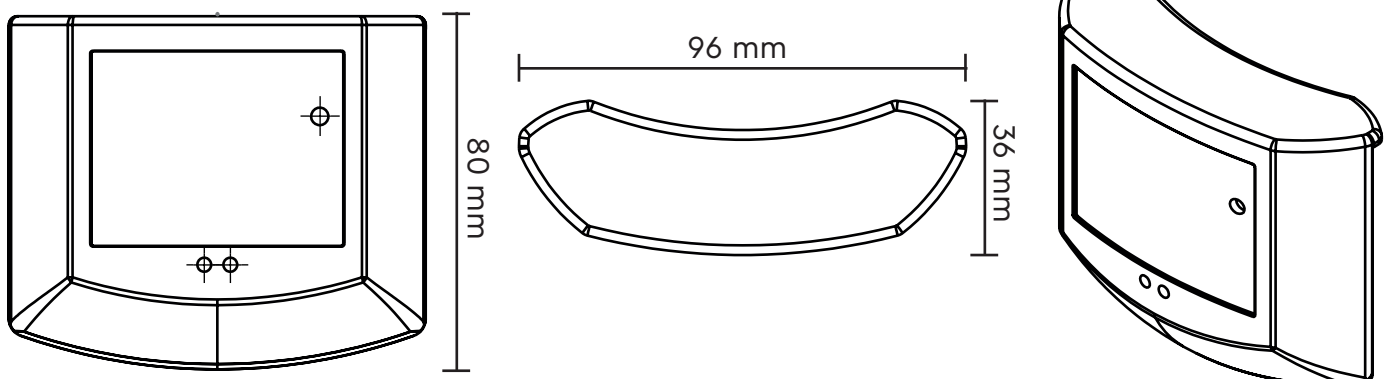

*Other frequencies on request